


TRIUMPH® 4705

Manual tabletop cutter with an 18 3/4-inch cutting width and fast-action clamp. SCS features ensure operator safety.

| | |
|------------------------------------|--------|
| Cutting width, inches | 18 3/4 |
| Cutting height, inches | 2 3/4 |
| Narrow cut, inches | 1 3/16 |
| Length behind blade, inches | 18 |

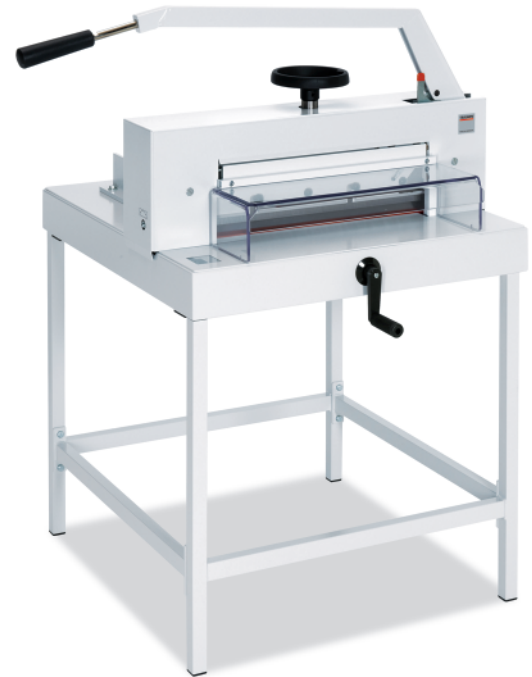

optional stand

SCS safety features: hinged, transparent safety guard on front table (locks automatically while cutting); transparent safety cover on rear table; safety catch (locks blade lever in up position); blade changing device covers cutting edge of blade; blade depth adjustment from outside of machine; blade and cutting stick can be changed without removing covers.

Spindle-guided back gauge with calibrated crank. Manual spindle clamp is guided on both sides to apply even pressure along entire cutting width. Front table measurement scale (mm / inches). High quality, German steel blade. Solid steel blade carrier and adjustable blade guides. All-metal construction. Optional stand.

Specifications

| | |
|---------------------------------------|---------------------------|
| Dimensions (D x W x H), inches | 35 x 39 x 23 ¹ |
| Shipping weight, pounds | 297 ² |

¹height with stand is 50 inches


²shipping weight with stand is 320 pounds

WWW.MBMCORP.COM
TEL: 800-223-2508

WWW.IDEAL-MBM.COM
TEL: 800-387-2528

TRIUMPH® 4705

Features

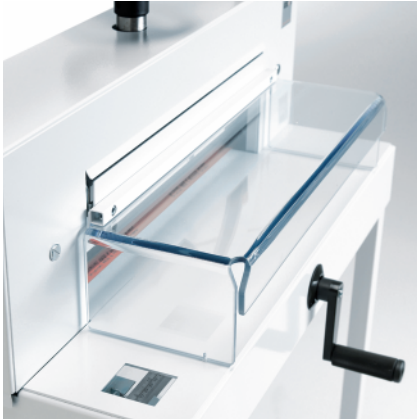

TRANSPARENT SAFETY GUARD

A cut can only be executed if the hinged safety guard is in the closed position and the blade safety catch is released.




HAND CRANK

The calibrated hand crank and front table measurement scale ensure precise back gauge positioning.



SPINDLE CLAMP WITH HAND WHEEL

The hand wheel is used to apply even clamping pressure along the entire cutting width.

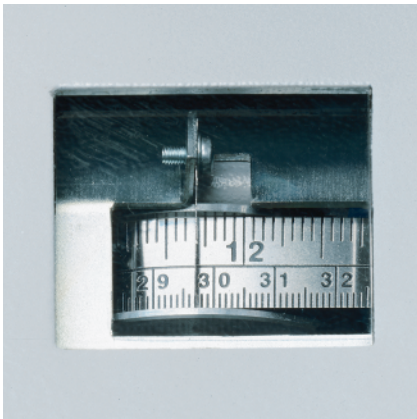

MEASUREMENT SCALE

The precision measurement scale on the front table allows precise back gauge positioning.



SAFE BLADE CHANGES

Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.



EASY CUTTING STICK CHANGE

Cutting sticks can be turned or changed easily from the outside of the machine—no tools are required.

